


**General overview:**  
**Human External Cargo (HEC), complex Personnel Carrying Device System (cPCDS)**  
**named "HEC\_5\_H125", for Airbus AS350/H125, all series**

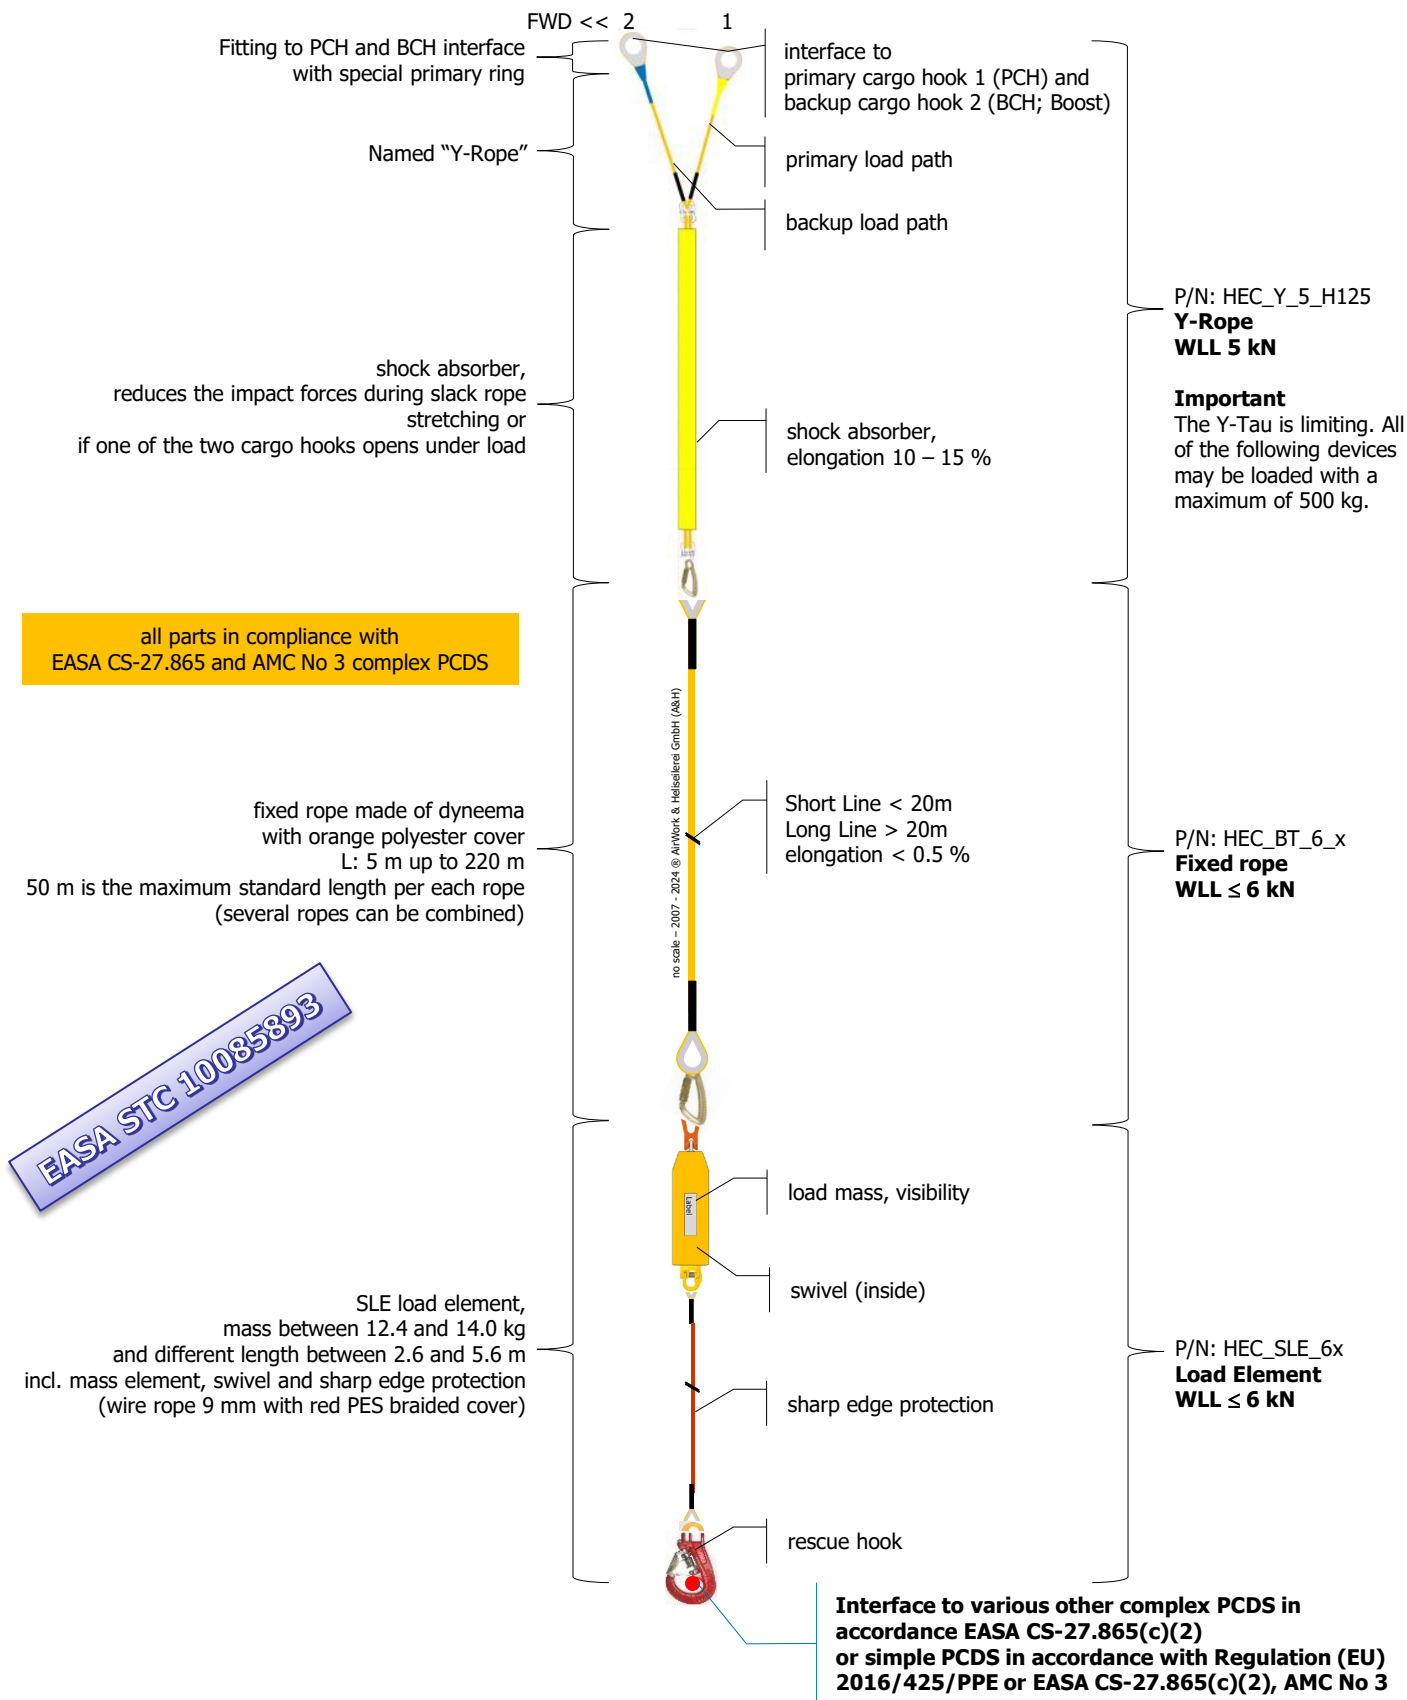

**The flying lines from A&H Equipment - feel experience and safety.**

First created	25.09.2023 LENG	Index
Last modified	26.11.2024 LENG	<b>D</b>
<b>DB HEC_5_H125_cPCDS</b>		2 pages


# Offer items and details (part number, length, masses)

Helicopter model: \_\_\_\_\_, S/N: \_\_\_\_\_ (if applicable), Customer (KZK): \_\_\_\_\_, AD: \_\_\_\_\_

Interface Dual Hook-System Boost HEC Systems «B1310-DHS»  
EASA STC 10081304

**EASA STC 10085893**

offer item \_\_\_\_\_

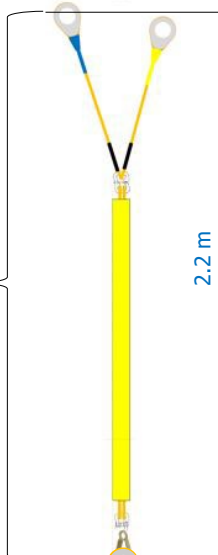

2.2 m


**P/N: HEC\_Y\_5\_H125**

➤ 2.2 m is the standard length

Please make an offer for \_\_\_\_\_ pc/s HEC\_Y\_6\_H125

please note: this part can not be changed (length, color, size).

offer item \_\_\_\_\_

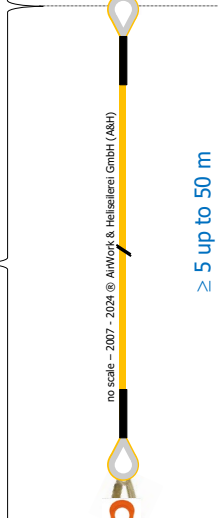

≥ 5 up to 50 m

**P/N: HEC\_BT\_6\_x** (6 = Sitze; 6 = WLL in kN; x = length in m). The colour is always orange


Please make an offer for

- Any individual rope length from 5 m to 50 possible;
- max 4 ropes of 50 m can be combined (total 200 m)
- Indicate below the desired numbers of ropes and the individual lengths:

<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> _____
<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> _____

please note: this part can vary in length between min. 5 m and max.50 m

offer item \_\_\_\_\_

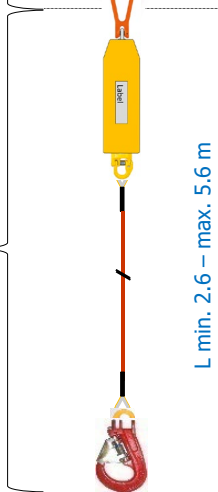

L min. 2.6 – max. 5.6 m

**P/N: HEC\_SLE\_6x\_x** (6x = size, \_x = length in m, WLL = ≤ 6 kN).

Please make an offer for

All options:	size	length m <sup>+/- 100mm</sup>	mass kg <sup>+/- 0.1 kg</sup>	select
HEC_SLE_6l_2	large	2.6	12.4	<input type="checkbox"/>
HEC_SLE_6l_3	"	3.6	13.0	<input type="checkbox"/>
HEC_SLE_6l_4	"	4.6	13.5	<input type="checkbox"/>
HEC_SLE_6l_5	"	5.6	14.0	<input type="checkbox"/>

Please note: this item may vary in length and weight, but not in the choice of fittings.  
the minimum weight of the SLE must be 11.4 kg (25 lbs) according to Boost STC 10081304

**Lengths**

- shortest possible length: 2.2 m (Y) + 2.6 m (SLE) = 4.8 m
- Standard length: 2.2 m (Y) + 50 m (BT) + 5.6 m (SLE) = 57.8 m
- Maximum length: 2.2 m (Y) + 4 x 50 m (BT) + 5.6 m (SLE) = 207.8 m

Offer item \_\_\_\_\_ options; simple PCDS

Approved up to 220 m

## The flying lines from A&H Equipment - feel experience and safety.

First created	25.09.2023 LENG	Index
Last modified	26.11.2024 LENG	<b>D</b>
<b>DB HEC_5_H125_cPCDS</b>		2 pages