


General overview:

Human External Cargo (HEC), complex Personnel Carrying Device System (cPCDS) with Boost System «B1310-DHS» named "HEC_5_H125", for Airbus AS350/H125, all series (EASA STC) and also for AS350/AS355 models, BELL 206L Series, BELL 407 (TCCA STC SH21-6, FAA STC SR04669NY)

Minor Change 2
Service Letter
AEF-0964-SLE-0004-01

Length and masses in feet and lbs see page 3

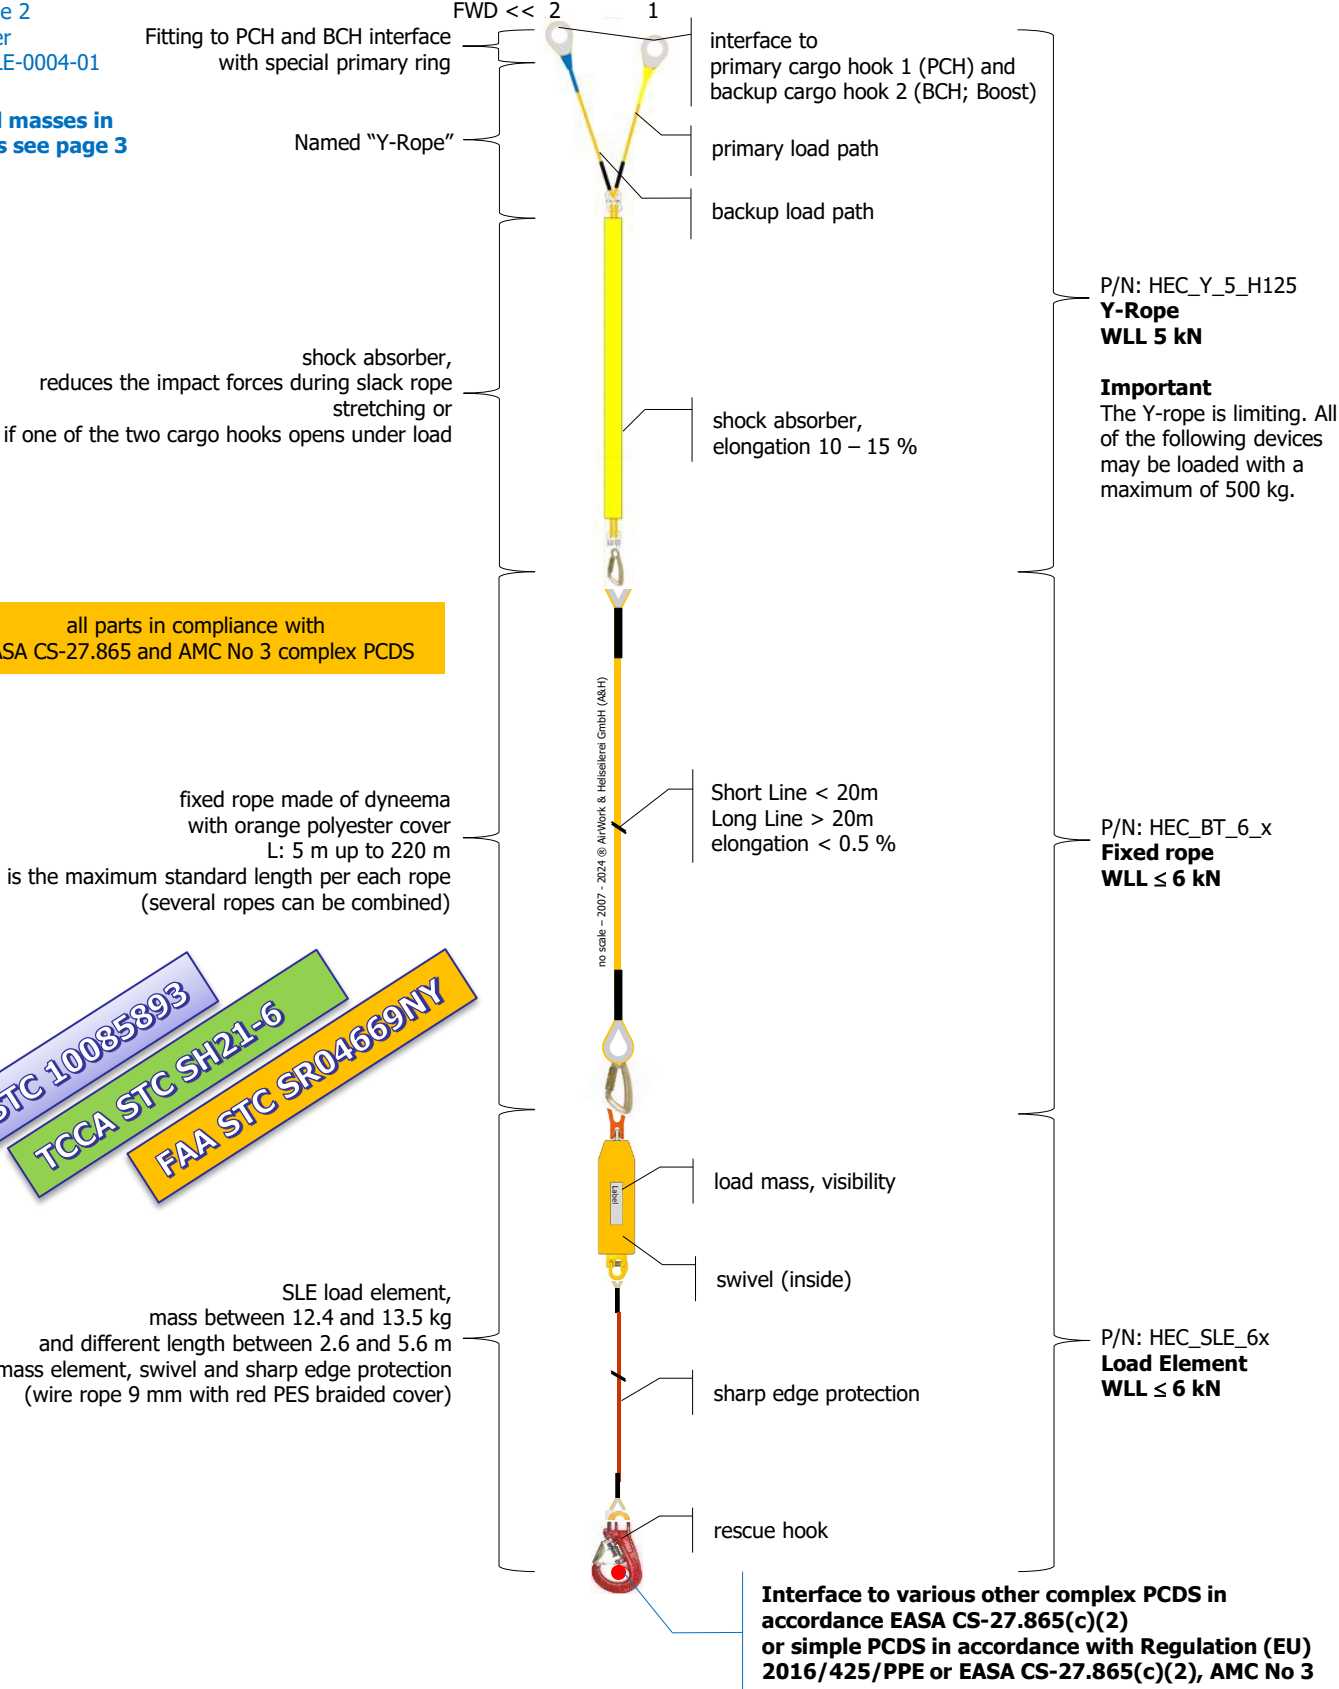

The flying lines from A&H Equipment - feel experience and safety.

Offer items and details (part number, length, masses)

Helicopter model: _____, S/N: _____ (if applicable), Customer (KZK): _____, AD: _____

Interface Dual Hook-System Boost HEC Systems «B1310-DHS»
EASA STC 10081304, TCCA STC SH21-6, FAA STC SR04669NY

EASA STC 10085893


TCCA STC SH21-6

FAA STC SR04669NY

Minor Change 2
Service Letter
AEF-0964-SLE-0004-01

**Length and masses in
feet and lbs see page 3**

offer item _____

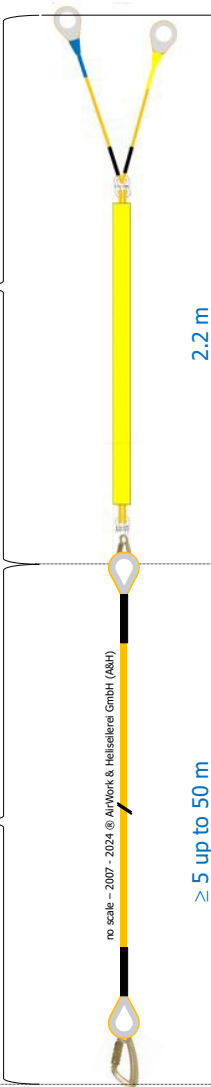


P/N: HEC_Y_5_H125

➤ 2.2 m is the standard length

☐ Please make an offer for _____ pc/s HEC_Y_5_H125

please note: this part can not be changed (length, color, size).

offer item _____

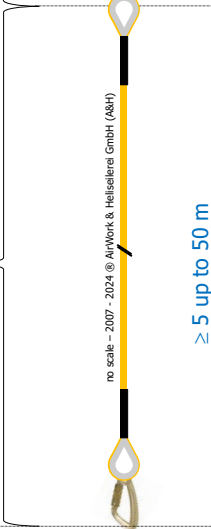

P/N: HEC_BT_6_x (6 = size; 6 = WLL in kN; x = length in m). The colour is always orange


☐ Please make an offer for

- Any individual rope length from 5 m to 50 possible;
- max 4 ropes of 50 m can be combined (total 200 m)
- Indicate below the desired numbers of ropes and the individual lengths:

☐ _____ ☐ _____ ☐ _____
☐ _____ ☐ _____ ☐ _____

please note: this part can vary in length between min. 5 m and max.50 m

offer item _____

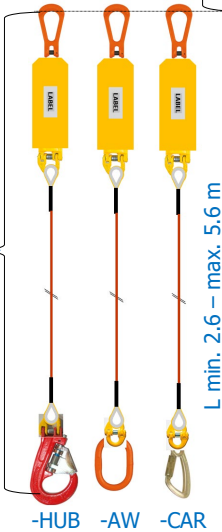

P/N: HEC_SLE_6I_x-x (6I = size, _x = length in m, -x = Type; WLL = ≤ 6 kN).

☐ Please make an offer for

All options (-HUB or _AW or _CAR):	length m	mass kg+/-
HEC_SLE_6I_2-HUB ☐ , -AW ☐ , -CAR ☐	2.6	12.4
HEC_SLE_6I_3-HUB ☐ , -AW ☐ , -CAR ☐	3.6	12.7
HEC_SLE_6I_4-HUB ☐ , -AW ☐ , -CAR ☐	4.6	13.1
HEC_SLE_6I_5-HUB ☐ , -AW ☐ , -CAR ☐	5.6	13.5

Please note:
Items, lengths, and weights of these items may vary.
The minimum weight of the SLE is 11.4 kg (25 lbs)
according to Boost STC 10081304

Lengths

- shortest possible length: 2.2 m (Y) + 0.55 m (SLE) = 2.75 m
- Standard length (e.g.): 2.2 m (Y) + 50 m (BT) + 5.6 m (SLE) = 57.8 m
- Maximum length: 2.2 m (Y) + 4 x 50 m (BT) + 5.6 m (SLE) = 207.8 m

Approved up to 220 m



P/N: HEC_SLE_6I-x

	length m	mass kg
HEC_SLE_6I-HUB ☐	0.55	11.2
HEC_SLE_6I-AW ☐	0.55	10.8
HEC_SLE_6I-CAR ☐	0.55	10.7

The flying lines from A&H Equipment - feel experience and safety.

AirWork & Heliseilerei GmbH (A&H)
A&H Engineering
Bahnhofweg 1 | CH-6405 Immensee
Your Partner. In Safety!



First created	25.09.2023 LENG	Index
Last modified	24.10.2025 LENG	F
DB HEC_5_H125_cPCDS		3 pages

Offer items and details (part number, length in ft, masses in lbs)

Helicopter model: _____, S/N: _____ (if applicable), Customer (KZK): _____, AD: _____

Interface Dual Hook-System Boost HEC Systems «B1310-DHS»
EASA STC 10081304, TCCA STC SH21-6, FAA STC SR04669NY

EASA STC 10085893

TCCA STC SH21-6

FAA STC SR04669NY


Minor Change 2
Service Letter
AEF-0964-SLE-0004-01

**Length and masses in
feet and lbs**

offer item

offer item

offer item

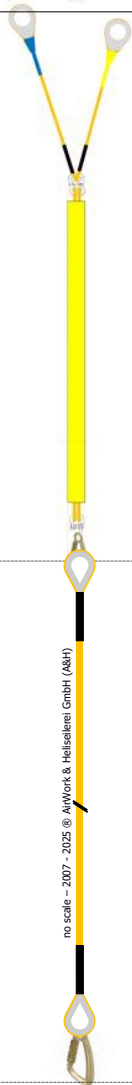

7.2 ft

≥ 15 up to 165 feet

P/N: HEC_Y_5_H125

➤ 7.2 ft is the standard length

☐ Please make an offer for _____ pc/s HEC_Y_5_H125

please note: this part can not be changed (length, color, size).

P/N: HEC_BT_6_x. (6 = WLL in kN; 50. = length in ft). The colour is always orange

Example: HEC_BT_6_50. is a 50 ft (15.2 m) long rope

☐ Please make an offer for

- Any individual rope length from 15 ft to 165 ft possible;
- max 4 ropes of 165 ft m can be combined (total 660 ft)
- Indicate below the desired numbers of ropes and the individual lengths:

☐ _____ ☐ _____ ☐ _____
☐ _____ ☐ _____ ☐ _____

Please note: this part can vary in length between min. 15 ft and max. 165 ft

P/N: HEC_SLE_6I_x-x (6I = size, _x = length in ft, -x = Type; WLL = ≤ 6 kN/1320 lbs).

☐ Please make an offer for

All options (-HUB or _AW or _CAR): length ft mass lbs+/-

HEC_SLE_6I_2-HUB ☐ , -AW ☐ , -CAR ☐ 8.5 27.3

HEC_SLE_6I_3-HUB ☐ , -AW ☐ , -CAR ☐ 11.8 28.0

HEC_SLE_6I_4-HUB ☐ , -AW ☐ , -CAR ☐ 15.1 28.9

HEC_SLE_6I_5-HUB ☐ , -AW ☐ , -CAR ☐ 18.4 29.8

Please note:
Items, lengths, and weights of these items may vary.
The minimum weight of the SLE is 11.4 kg (25 lbs)
according to Boost STC 10081304

Lengths

- shortest possible length: 7.2 ft (Y) + 1.8 ft (SLE) = 9 ft
- Standard length (e.g.): 7.2 ft (Y) + 165 ft (BT) + 18.4 ft (SLE) = 190.6 ft
- Maximum length: 7.2 ft (Y) + 4 x 165 ft (BT) + 18.4 ft (SLE) = 685.6 ft

Approved up to 722 ft



-HUB -AW -CAR

L 1.8 ft

P/N: HEC_SLE_6I-x

	length ft	mass lbs
HEC_SLE_6I-HUB ☐	1.8	24.7
HEC_SLE_6I-AW ☐	1.8	23.7
HEC_SLE_6I-CAR ☐	1.8	23.5

The flying lines from A&H Equipment - feel experience and safety.

AirWork & Heliseilerei GmbH (A&H)
A&H Engineering
Bahnhofweg 1 | CH-6405 Immensee
Your Partner. In Safety!



First created	25.09.2023 LENG	Index
Last modified	24.10.2025 LENG	F
DB HEC_5_H125_cPCDS		3 pages